

Sentry[™] Equipped 3G, 4G LTE and 5G Signal Amplifier for Large Buildings

Overview

SureCall's Force8 is the first bi-directional cell signal amplifier for the 5G network. Force8 improves 5G cell service for the T-Mobile (600 MHz band) and AT&T (2.3 GHz band). Additionally, Force8 is a HetNet and HetGen solution that improves cell service for every US cellular network and all cellular generations including 3G and 4G LTE voice, text, and data signals.

The Force8 industrial grade cell phone signal booster is equipped SureCall Cloud powered by Sentry to allow remote access to make adjustments to the system anytime and anywhere via desktop or mobile application (iPhone | Android).

Features

- First 5G signal booster that improves 5G service inside buildings for the T-Mobile (600 MHz) and AT&T (2.3 GHz) bands
- Improves 3G and 4G LTE voice, text, and data signals for every US cell carrier
- Eliminates dropped and missed calls in buildings up to 80,000-square-feet*
- Built-in remote monitoring hardware allows cloud controlled adjustments to the booster anytime and anywhere via mobile SureCall Cloud app (iPhone | Android)
- Each band is independently configurable to function in the most challenging environments
- Customizable kitting and multi-amplifier scalability provide the flexibility to accommodate any floor plan
- Best-in-Industry three-year warranty

Booster Kit Includes

Force8 Industrial booster with built-in Sentry monitoring system, power supply, USB cable to set up Sentry software

Additional Required Components

- An outside antenna (such as SC-530W Yagi or SC-588W omni-directional antenna)
- Multiple indoor antennas (such as, omni-directional dome SC-522W, SC-528W Ultra Thin™ or directional panel SC-548W)
- · Cable splitter for multiple indoor antennas
- Sufficient low loss 50 ohm cable for interior/exterior antenna connection
- · Lightning protector & grounded surge suppressor
- Ethernet cable to connect the booster to your router (for Sentry monitoring)



The SureCall Force8 Industrial Amplifier

Key Product Specifications

Supported Standards: LTE-A, LTE-V, PCS, AWS

T-Mobile 600 MHz, AT&T WCS

Max Gain: 80 dB

Gain Adjustment Range: 50 dB

Noise Figure: 7 dB

VSWR: < 2.0

Max Output Power: 3 Watt EIRP

RF Connectors: N Female (both ends)

Power Consumption: <65W





48346 Milmont Dr. Fremont, CA 94538

888-365-6283

www.surecall.com info@surecall.com

^{*} Performance and coverage area are dependent upon the strength of cell signal outside of the building and density of structure and materials inside of the building.



FORCE8™ Industrial




3G, 4G LTE and 5G Signal Amplifier for Large Buildings

Force8 Industrial Specifications

Certifications	FCC: RSNFORCE8-IND
Weight:	32.4 lbs
Dimensions:	12.96 x 16.43 x 3.86 inches
Power Consumption:	<65W
AC Power Adapter:	Input AC 110-240 V, 60 Hz / Output DC 19 V
Cable:	SC-400 (not provided)
RF Connectors:	N Female, both ends
Maximum Output Power:	3 Watt EIRP
WSR:	≤2.0
Noise Figure:	7 dB
Gain Adjustment Range:	50 dB
Maximum Gain:	80 dB
Input / Output Impedance:	50 Ω
Supported Standards:	LTE-A, LTE-V, PCS, AWS, T-Mobile 600 MHz, AT&T WCS
Downlink Frequency Range (MHz):	617-652 / 728-746 / 746-757 / 864-894 / 1930-1995 / 2110-2155 / 2350-2360
Uplink Frequency Range (MHz):	663-716 / 776-787 / 819-849 / 1850-1915 / 1710-1755 / 2305-2315

Installation Example

Specifications are subject to change.

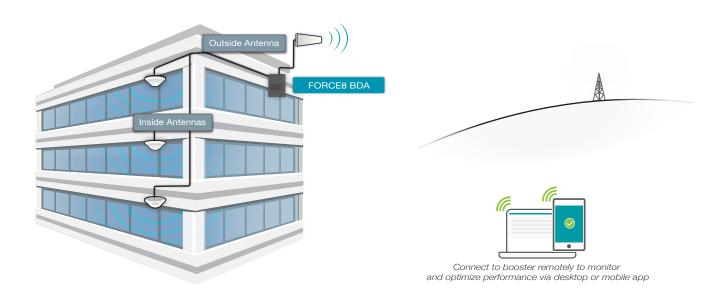

This is NOT a CONSUMER device. It is designated for installation by FCC LICENSEES and QUALIFIED INSTALLERS. You MUST have an FCC LICENSE or express consent of an FCC Licensee to operate this device. Unauthorized use may result in significant forfeiture penalties, including penalties in excess of \$100,000 for each violation. ↑ Cancer and Reproductive Harm – www.P65Warnings.ca.gov